

Ventilation Solutions Laundries



Switch to the real deal.


Adhearing to UL705* designed exclusively for dryer exhaust.

DEDPV-705 A.K.A. The Real Deal



CERTIFIED BY UL TO THE DEDPV **REQUIREMENTS OF UL705***

*2018 International Residential Code MI1502.4.4 Domestic dryer exhaust duct power ventilators shall conform to UL 705 for use in dryer exhaust duct systems (DEDPV). The dryer exhaust duct power ventilator shall be installed in accordance with the manufacturer's instructions.

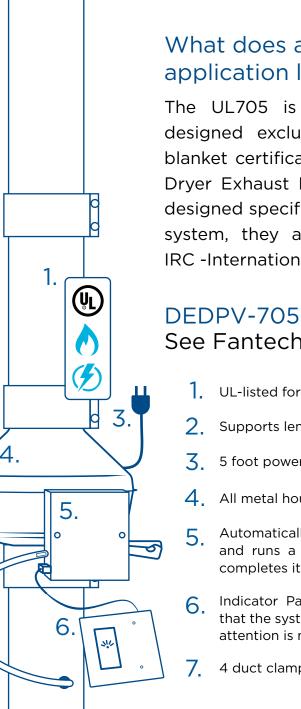

7.

£

125

2.

Go the extra mile

No matter how you're mitigating dryer exhaust, we recommend going the extra mile by installing a secondary lint trap which extends the maintenance cycle of cleaning out the exhaust duct.

DBLT 4W Lint Trap

🖑 fantech

What does a UL-listed dryer application look like?

The UL705 is a unique UL listing that was designed exclusively for dryer exhaust, not a blanket certification for any old fan. Not only are Dryer Exhaust Duct Power Ventilators (DEDPVs) designed specifically to be part of a dryer exhaust system, they are also referenced in the latest IRC -International Residental Code.

See Fantech's response to the UL-705

UL-listed for both Gas & Electric dryer applications.

2. Supports lengths of duct up to 125 feet.*

5 foot power cord/120v

4. All metal housing.


Automatically energizes when the dryer begins to operate and runs a 5 minute cool down cycle after the dryer completes its run cycle; No user interaction necessary!

Indicator Panel: Provides confidence to the occupants that the system is working properly and also signals when attention is necessary.

7 4 duct clamps for easy install and maintenance.





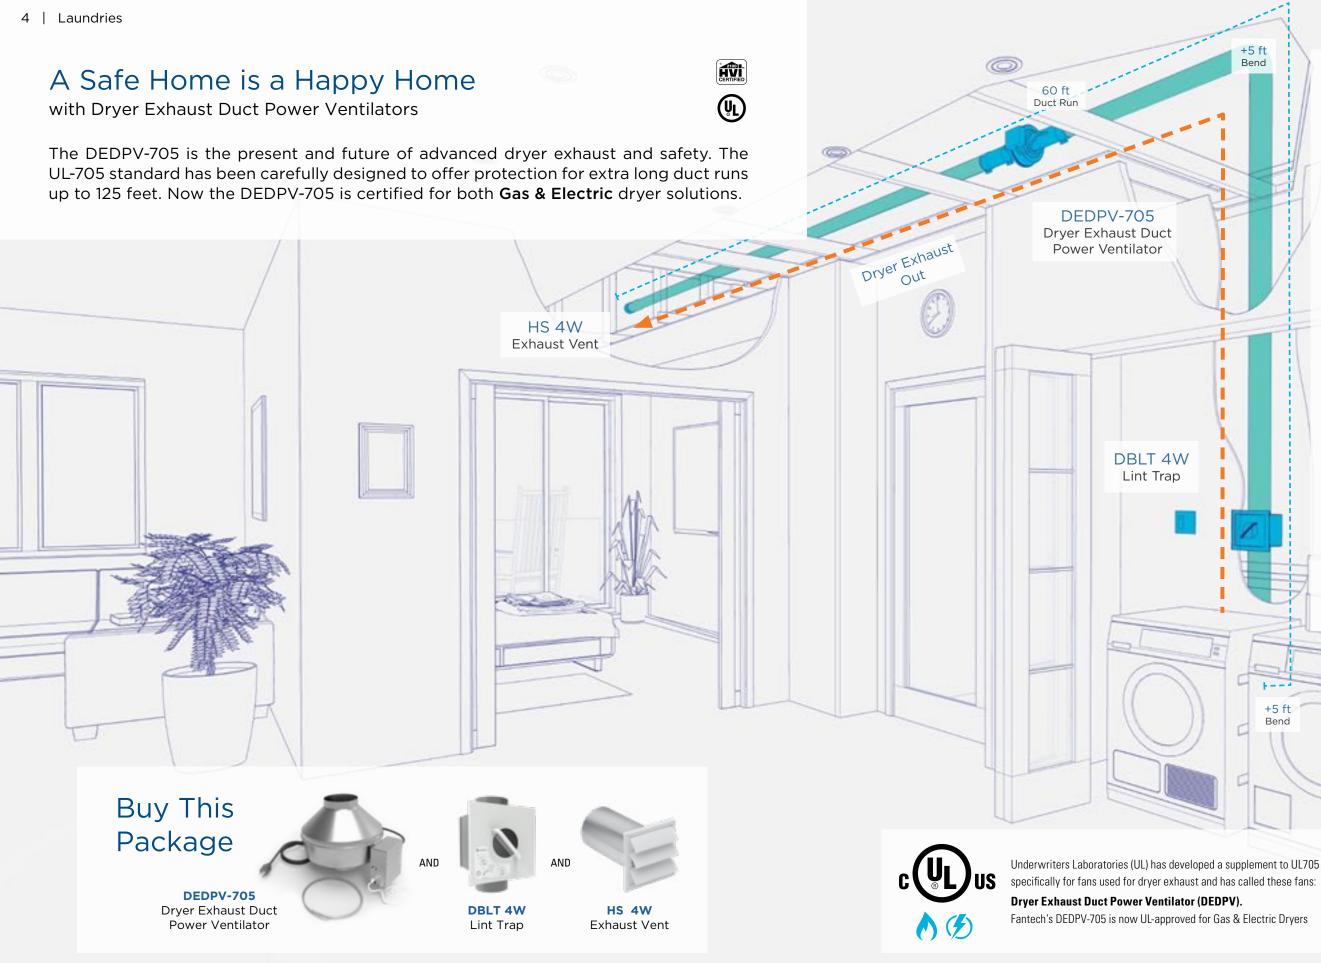

Calculate Your Duct Runs*

The DEDPV-705 fan is rated up to **125 feet** in duct length for dryer applications. In general, duct runs frequently exceed the 35 ft specified as the max duct length in the building codes. For every 90 degree elbow, add 5 additional feet of duct length and for 45 degree elbow add 2.5 feet. The paragraph below illustrates how the duct length can be calculated.

For example: If a 4" duct connection from a dryer to the roof vent is **60 linear feet** with two 90 degree elbows, then the total duct run is 70 feet. As stated above, for every 90 degree elbow, 5 feet must be added to the total duct length.

> --- Duct Length **Direction of Airflow**

*Example written based on residentail code sited at https://codes.iccsafe.org/content/IRC2018/chapter-15-exhaust-systems

DBF Series Duct Booster Fans


These inline duct boosting fans are pressure activated and suitable for longer duct runs that need an extra boost to get air to its destination.



Go the extra mile

No matter how you're mitigating dryer exhaust, we recommend going the extra mile by installing a secondary lint trap which extends the maintenance cycle of cleaning out the exhaust duct.

DBLT 4W Lint Trap



...that according to the National Fire Prevention Association (NFPA), the leading cause of home fires is from lint ignition in the dryer or dryer duct?

A DEDPV-705 or Dryer Exhaust Fan from Fantech[®] maintains an airflow that keeps lint suspended while exhausting it to the outside, thereby reducing the risk of fire.

..that Spontaneous Combustion can occur in the dryer after the dryer stops due to high heat and no airflow?

The DEDPV-705 continues to operate for a short period of time after the dryer stops which cools the clothes and lessens the risk of spontaneous combustion.

...that dryers don't have an indicator to tell if there is a build up of lint in the duct?

A safety feature of the DBF4XLT and DEDPV-705 is a visual indicator panel. This provides the user with a visual indication of correct operation or indication of a pressure increase due to a blocked duct. This advanced warning allows the user to take action to clean the dryer exhaust duct.

..that most dryers are limited to a duct run of 35'?

Using the DEDPV-705, or Dryer Exhaust Duct Power Ventilators, can increase the duct run up to 125 feet, as the fan relieves the pressure in the extended duct allowing the dryer to work efficiently.



Customer Support: USA 800.747.1762 • USsupport@fantech.net

> Send Orders: USorders@fantech.net

Distributed Locally by:

Systemair Inc. reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications to maintain their technological leadership position. The application rendering presented in this brochure is for a visual presentation purpose only. Please, contact a professional for technical guidance.

Systemair Inc. • January 2020, E1939